TOWER BTG CHILLED AND HEATED

cossiga

RF

BTG RF6
BTG RF9
BTG RF12
BTG RF15
BTG RF18

- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled rear doors
- Sliding rear doors
- Deck forced refrigeration
- Three adjustable shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser
- Sliding front doors - optional (excl RF18)

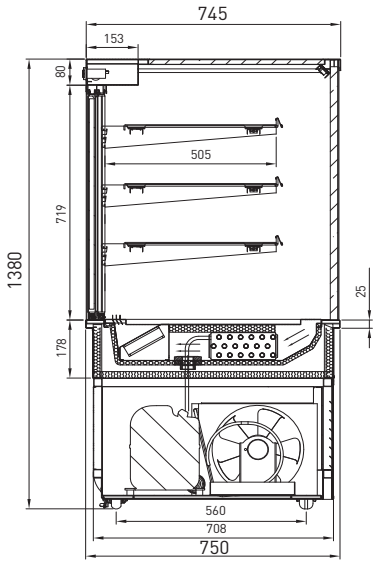

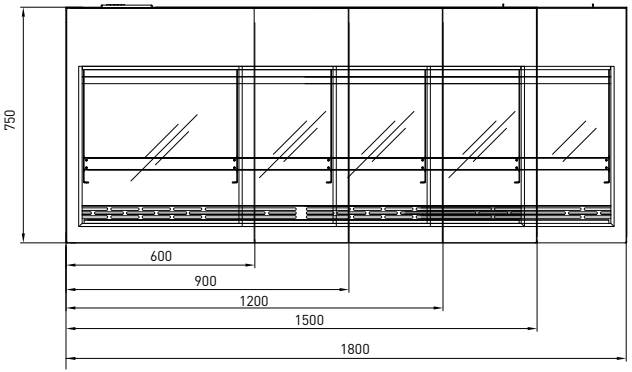

Rear intake and extract ventilation system

HT

BTG HT6
BTG HT9
BTG HT12
BTG HT15

- Deck forced heating
- Single glazed
- Sliding rear doors
- Four adjustable shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Sliding front doors - optional

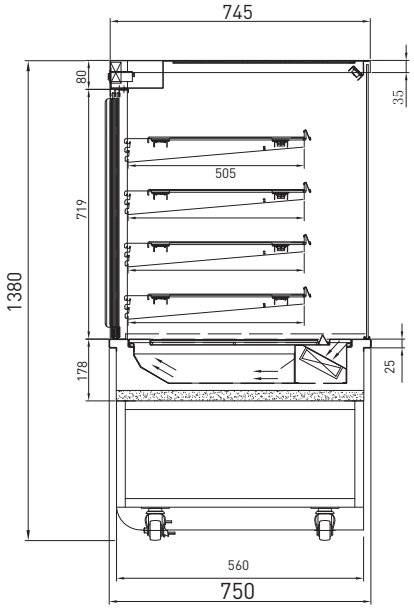

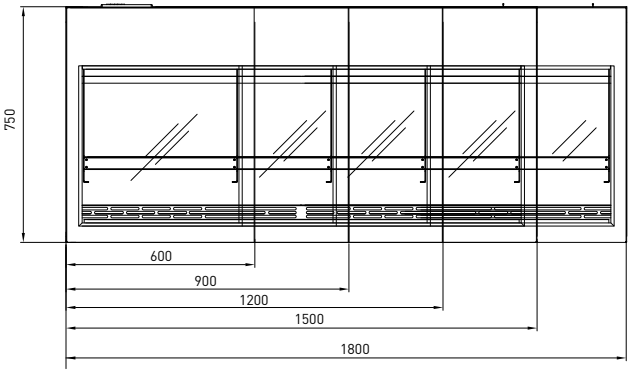

Download C.A.D models or contact us on COSSIGA.COM

AB

BTG AB6
BTG AB9
BTG AB12
BTG AB15

- Single glazed
- Sliding rear doors
- Four adjustable shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Sliding front doors - optional
- Ambient converted from heated
- Air removal fan installed in ceiling

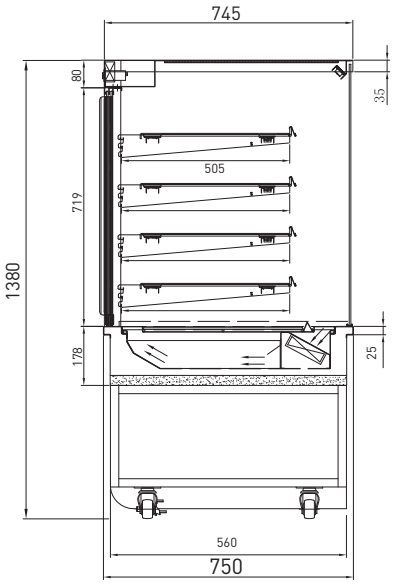

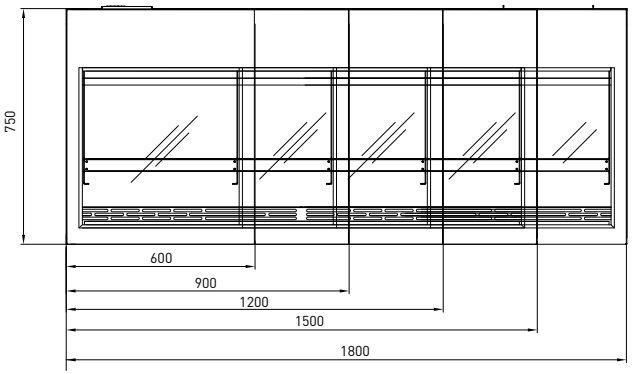

RA

BTG RA10
BTG RA15

- Combo unit chilled and ambient
- Heated front and top glass
- Solid front only
- Sliding rear doors - chilled section
- Hinged rear door - ambient section
- Ticket strips on shelves and base
- Under shelf and canopy LED lights

  Front doors not available for this model

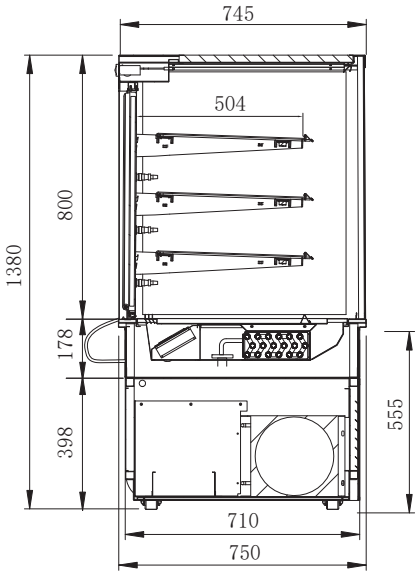

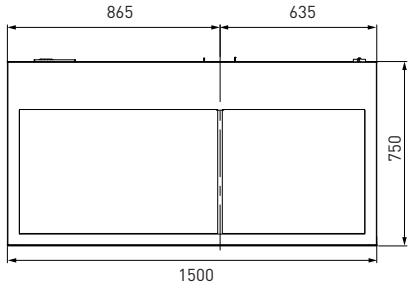



Rear intake and extract ventilation system

OR

BTG OR6
BTG OR9
BTG OR12
BTG OR15

- Open front
- 2 adjustable shelves
- Stainless steel hinged rear doors
- Deck forced refrigeration
- Double glazed glass ends
- Two adjustable glass shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Pull down night blind

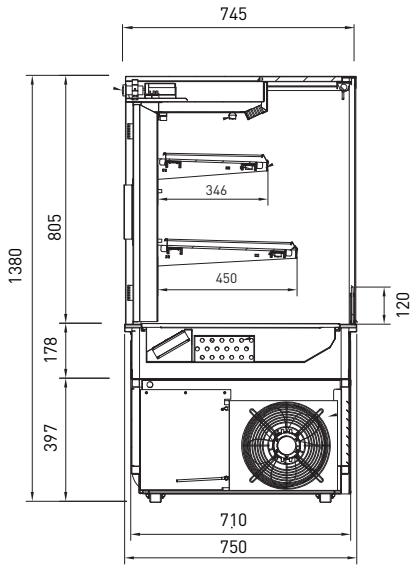

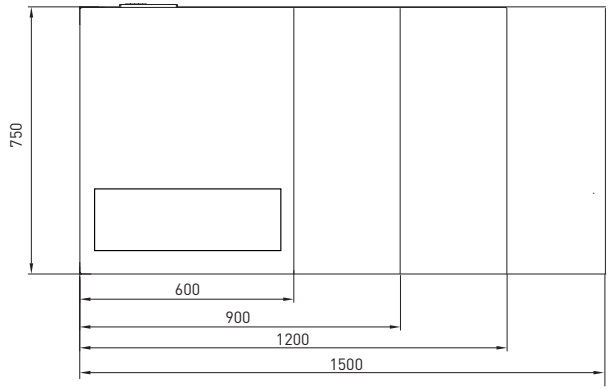

Rear intake and extract ventilation system

OH

BTG OH6
BTG OH9

- Open front heated
- 3 adjustable shelves
- Individual shelf heating
- Deck forced heating
- Single glazed
- Ticket strips on shelves and base
- Under shelf and canopy LED lights

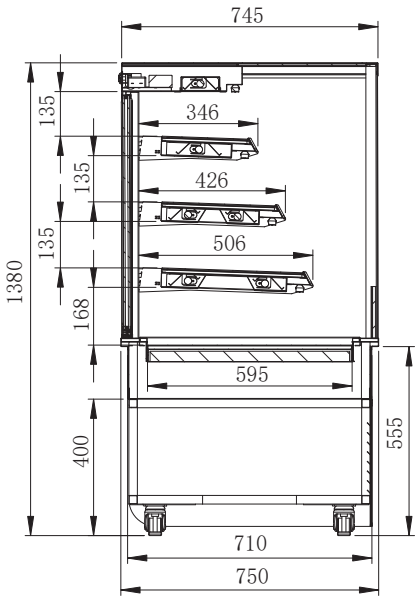

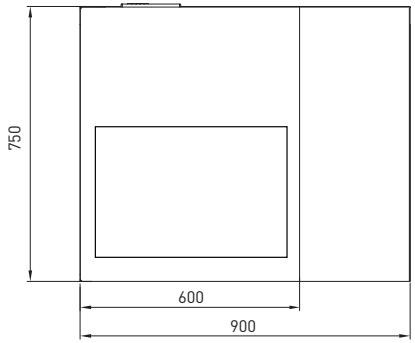

Download C.A.D models or contact us on COSSIGA.COM

TOWER BTG SPECIFICATIONS

cossiga

CABINET DIMENSIONS & SPECIFICATIONS

MODEL	CABINET			SHELVING	OPERATING TEMP	POWER CORD LENGTH	SHELF	BASE TRAY	TOTAL FOOD	FREQUENCY	REFRIGERANT	OPERATING CURRENT	CONNECTION	VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]		DEG C		W X D	W X D	100MM UNITS						LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
BTGRF6	600	750	1380	3 + BASE	3-5	2200MM	490 X 445	540 x510	86	50/60 HZ	134A	4.2 AMP	10AMP 3 PIN PLUG	220-240V	700	830	1550	175
BTGRF9	900	750	1380	3 + BASE	3-5	2200MM	790 X 445	840 x510	136	50/60 HZ	134A	4.5 AMP	10 AMP 3 PIN PLUG	220-240V	1000	830	1550	224
BTGRF12	1200	750	1380	3 + BASE	3-5	2200MM	1090 X 445	1140 x 510	175	50/60 HZ	134A	5.0 AMP	10 AMP 3 PIN PLUG	220-240V	1300	830	1550	273
BTGRF15	1500	750	1380	3 + BASE	3-5	2200MM	1390 X 445	1440 x 510	285	50/60 HZ	134A	6.0 AMP	10 AMP 3 PIN PLUG	220-240V	1600	830	1550	329
BTGRF18	1800	750	1380	3 x 2 + BASE	3-5	2200MM	820 X 445	1740 x 510	325	50/60 HZ	134A	7.8 AMP	10 AMP 3 PIN PLUG	220-240V	1900	830	1550	
BTGHT6	600	750	1380	4 + BASE	75-85	2200MM	490 X 445	540 x 510	100	50/60 HZ	N/A	4.1 AMP	10 AMP 3 PIN PLUG	220-240V	700	830	1550	118
BTGHT9	900	750	1380	4 + BASE	75-85	2200MM	790 X 445	840 x 510	168	50/60 HZ	N/A	6.2 AMP	10 AMP 3 PIN PLUG	220-240V	1000	830	1550	150
BTGHT12	1200	750	1380	4 + BASE	75-85	2200MM	1090 X 445	1140 x 510	255	50/60 HZ	N/A	8.3 AMP	10 AMP 3 PIN PLUG	220-240V	1300	830	1550	182
BTGHT15	1500	750	1380	4 + BASE	75-85	2200MM	1390 X 445	1440 x 510	355	50/60 HZ	N/A	10.4 AMP	15 AMP 3 PIN PLUG	220-240V	1600	830	1550	214
BTGAB6	600	750	1380	4 + BASE	N/A	2200MM	490 X 445	540 x 510	100	50/60 HZ	N/A	0.2 AMP	10 AMP 3 PIN PLUG	220-240V	700	830	1550	133
BTGAB9	900	750	1380	4 + BASE	N/A	2200MM	790 X 445	840 x 510	168	50/60 HZ	N/A	0.3 AMP	10 AMP 3 PIN PLUG	220-240V	1000	830	1550	133
BTGAB12	1200	750	1380	4 + BASE	N/A	2200MM	1090 X 445	1140 x 510	255	50/60 HZ	N/;A	0.4 AMP	10 AMP 3 PIN PLUG	220-240V	1300	830	1550	157
BTGAB15	1500	750	1380	4 + BASE	N/A	2200MM	1390 X 445	1440 x 510	355	50/60 HZ	N/A	0.5 AMP	10 AMP 3 PIN PLUG	220-240V	1600	830	1550	158
BTGRA10	1000	750	1380	3+BASE 3+BASE	3-5 AMBIENT	2200MM	615 X 445 238 X 445	615 x 510 238 x 510	RF 102 AB 44	50/60 HZ	134A	4.3 AMP	10 AMP 3 PIN PLUG	220-240V	1100	830	1550	260
BTGRA15	1500	750	1380	3+BASE 3+BASE	3~5 AMBIENT	2200MM	790 X 445 564 X 445	790 X 510 564 X 510	RF 124 AB 90	50/60 HZ	134A	4.6 AMP	10 AMP 3 PIN PLUG	220-240V	1600	830	1550	350

Maximum shelf load weight 15kg spread evenly

Front doors not available for these models RF18, RA10, RA15

TOWER BTG SPECIFICATIONS

cossiga

CABINET DIMENSIONS & SPECIFICATIONS

MODEL	CABINET			SHELVING	SHELVES SIZE					TOTAL FOOD	FREQUENCY	REFRIGERANT	OPERATING CURRENT	CONNECTION	VOLTAGE	PACKED FOR SHIPPING			
	LENGTH (MM)	DEPTH (MM)	HEIGTH (MM)		TOP	2ND	3RD	4TH	BASE(WXD)	100MM UNITS	50/60 HZ					LENGTH (MM)	DEPTH (MM)	HEIGTH (MM)	WEIGHT (KG)
BTGOR6	600	750	1380	2+BASE	490X290	490X380	NA	NA	545X515	55	50/60 HZ	134A	3.3AMP	10AMP 3 PIN PLUG	220~240V	700	830	1550	175
BTGOR9	900	750	1380	2+BASE	790X290	790X380	NA	NA	845X515	114	50/60 HZ	134A	3.7AMP	10AMP 3 PIN PLUG	220~240V	1000	830	1550	224
BTGOR12	1200	750	1380	2+BASE	1090X290	1090X380	NA	NA	1145X515	123	50/60 HZ	134A	5.4AMP	10AMP 3 PIN PLUG	220~240V	1300	830	1550	273
BTGOR15	1500	750	1380	2+BASE	1390X290	1390X380	NA	NA	1445X515	168	50/60 HZ	134A	6.5AMP	10AMP 3 PIN PLUG	220~240V	1600	830	1550	285
BTGOH6	600	750	1380	3+BASE	490X255	490X335	490X415	NA	548X595	50	50/60 HZ	NA	8.1AMP	10AMP 3 PIN PLUG	220~240V	700	830	1550	119
BTGOH9	900	750	1380	3+BASE	790X255	790X335	790X415	NA	848X595	96	50/60 HZ	NA	12.6AMP	15AMP 3 PIN PLUG	220~240V	1000	830	1550	153

Maximum shelf load weight 15kg spread evenly

Front doors not available for these models RF18, RA10, RA15